



COMBO'CORNER 75 AND 50

→ 90° CORNER PROTECTORS ON ALUMINIUM CORE



Applications

Combo'Corner 75 or 50 protects the 90° corners in corridors from heavy traffic. Its slightly textured surface helps to conceal the effects of abrasion.

Description

- Model: Combo'Corner 75 or 50 corner protector on aluminium core
- Angle: 90°
- Wing width (internal measurement):
 - 68 mm Combo'Corner 75
 - 46 mm Combo'Corner 50
- Thickness: 2 mm
- Length: 1.30 m, 2.00 m or 4.00 m
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: smooth or slightly textured («Optimixt» grain*)
- Fixing: continuous aluminium core
- Colours: 4 standard and 28 on request (please consult us)

**Optimixt" grain: optimal combination of scratch resistance, hygiene and aesthetic.

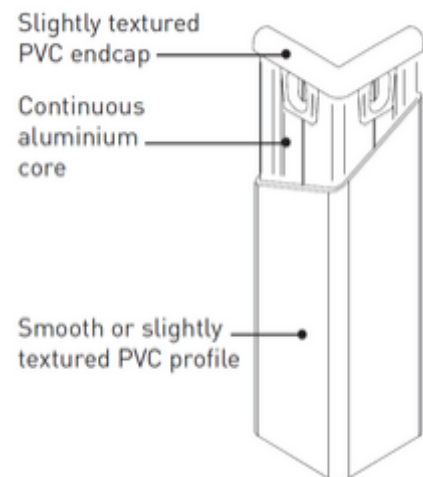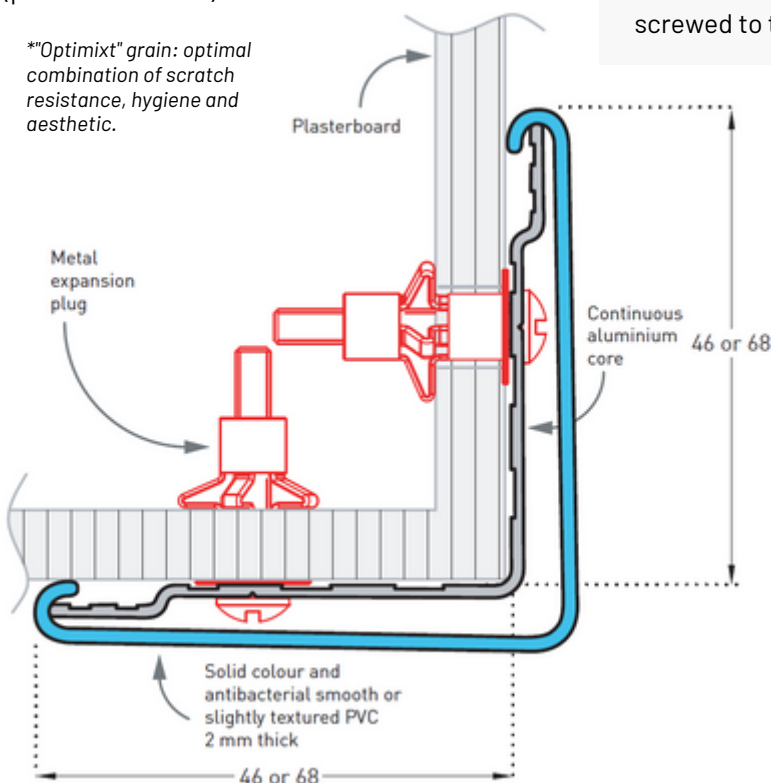

Specification

- Description: 90° corner protector on aluminium core (Combo'Corner 75 or 50 as manufactured by SPM) from smooth or slightly textured (Optimixt grain as manufactured by SPM) and antibacterial PVC, 2mm thick, achieving Bs2d0 fire rating with solid colour. Wings are 68 mm or 46 mm wide (internal measurement) and snap-fix onto a continuous aluminium core. The corner protector is finished with a slightly textured PVC end cap.
- Environment: no heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/BPA. The calcium zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the French regulation (23 March 2011 nr 2011-32 1 Decree and 19 April 2011 Order). 100% of the product are recyclable.
- Colour: selected by architects from manufacturer's standard range. The end cap colours are the same as the profile of the corner protector.
- Installation method : snap-fixes to continuous aluminium core screwed to the wall.