



DuraPlan
— RESTROOMS —

COLOUR CHART

**DuraLam 13mm
Anti Bacterial
Compact Laminate**

09 972 7682
sales@duraplan.co.nz
www.duraplan.co.nz

HARMFUL BACTERIA NOT ONLY GROWS EXPONENTIALLY BUT THRIVES PRACTICALLY ANYWHERE.

Duralam Board will keep your environment clean!



Invisible to the naked eye, these harmful bacteria are on most surfaces that our hands come into contact with on a daily basis. These bacteria breach our immune system, break down defences and attack good body cells which we need to fight off illness and disease.

This is why DuraPlan has introduced the DuraLam range.


DuraLam is an Antibacterial Range of compact laminate that gives you the power to eliminate almost 99% of common bacteria. This is not only the most advanced and protective laminate in New Zealand but the world over. Now with DuraLam Antibacterial compact laminates, you can continue your healthy lifestyle knowing you have done everything you can to keep you and your loved ones protected.

- ✓ **EASY TO CLEAN**
- ✓ **ANTIBACTERIAL**
- ✓ **MOISTURE RESISTANT**
- ✓ **GRAFFITI RESISTANT**
- ✓ **IMPACT RESISTANT**
- ✓ **DURABLE**




Actual product colours may vary from colours shown on your screen. Please feel free to request samples if unsure.

Popular Classics




111 Designer White



49931 Silver



44754 Cloudy Graphite



21069 Classic Grey



10894 Teak



22099 Charcoal

Vivids



204 Red Apple



291 Royal Blue



259 Green Apple



149 Sheer



22114 Salmon Orange



207 Divine Yellow

Actual product colours may vary from colours shown on your screen.
Please feel free to request hi-res image or samples.

Woodgrains



10894 Teak



5378 Charred Chevron



5387 Rustic Birch



10175 Maple



10844 Monnestr Oak




10243 Straight Grained Wenge


Textures & Patterns



5577 Concrete

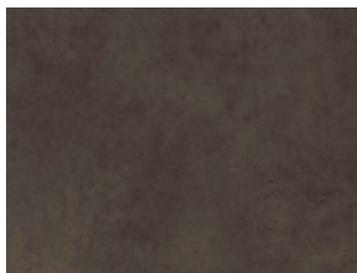

5578 Slate

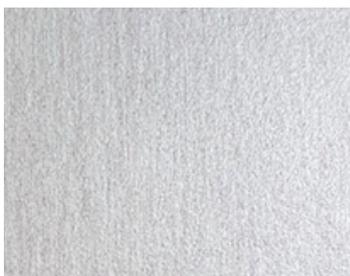


49931 Silver



44754 Cloudy Graphite

DURALAM TECHNICAL SPECIFICATIONS

Duralam protection layer by layer breakdown

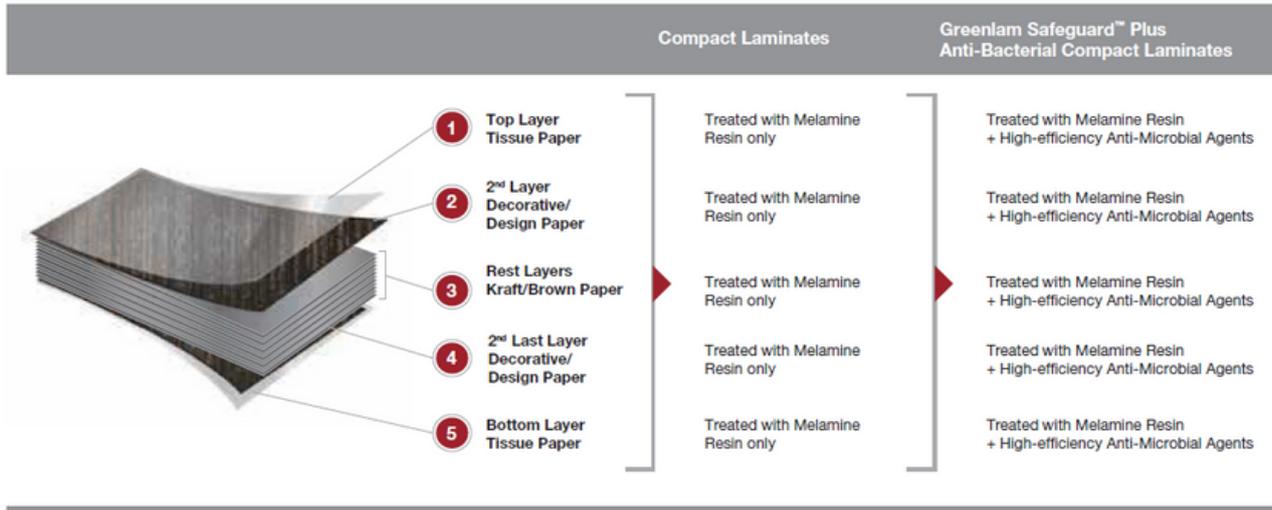

TECHNICAL SPECIFICATION VS STANDARDS

PROPERTIES	UNIT	Specified Values As Per DIN EN 438, BSEN 438 & IS 1995 :2046	Duralam Typical Value
Thickness tolerance	mm	0.5 ± 13.0	0.28 ± 13.0
Resistance to dry heat at °180C	Grade	Not worse than 4	5
Resistance to surface wear	Rev.	350 (Min.)	400
Resistance to immersion in boiling water			
a) Mass increase	%	2.0 (Max.)	0.50
b) Thickness	%	2.0 (Max.)	0.70
c) Appearance	Grade	Not worse than 4	5
Dimensional stability at deviated temperature			
a) Longitudinal	%	0.06 (Max.)	0.03
b) Transverse	%	0.53 (Max.)	0.12
Dimensional stability at °20C			
a) Longitudinal	%	0.16 (Max.)	0.08
b) Transverse	%	0.28 (Max.)	0.13
Resistance to impact by large diameter ball			
a) Drop height	mm	1800	2000
b) Diameter of indentation	mm	10 (Max.)	2
Resistance to scratch	N	2.0 (Min.)	2.5
Resistance to staining			
a) Group 1 & 2	Grade	Not worse than 5	6
b) Group 3 & 4	Grade	Not worse than 4	5
Resistance to colour change			
a) In Xerox Arc Light	Grade	Not worse than 6	6
b) In Enclosed Carbon Arc Light	Grade	Not worse than 5	5
Resistance to cigarette burns	Grade	Not worse than 3	4
Resistance to steam	Grade	Not worse than 4	5
Resistance to crazing	Grade	Not worse than 4	5
Resistance to moisture	Grade	Not worse than 4	5
Flexural modulus	Mpa	10000 (Min.)	11000
Flexural strength	Mpa	100 (Min.)	120
Tensile strength	Mpa	70 (Min.)	90
Density	g/cm³	1.35	1.40

For enquiries, further information, pricing or placing order please contact Duraplan Systems Ltd

Phone +64 9 972 7682 | **Email** sales@duraplan.co.nz | **Website** www.duraplan.co.nz



DuraPlan

— RESTROOMS —

DuraLam 13mm Anti Bacterial Compact Laminate Panel

Phone +64 9 972 7682

Address 6 Springs Flat Road,
PO Box 4477, Kamo 0112,
Whangarei, New Zealand

Email sales@duraplan.co.nz

www.duraplan.co.nz

13mm Compact Laminate Colour Chart