

TECHNICAL GUIDE

Classic Range

Strong, Robust & Multifunctional Cubicles in Classic Designs

09 972 7682 sales@duraplan.co.nz www.duraplan.co.nz

Resistant to: Impact, Moisture, Wear, and Graffiti

| SYSTEM INFORMATION

- 13mm compact laminate panels which are anti-bacterial, impact, moisture, wear, and graffiti resistant, easy to clean and maintain, and have a 10-year panel integrity
- · Strong aluminium support frames
- Vertical aluminium support posts fixed directly to the floor with concealed fixings. Are fixed at the top through the headrail and compact laminate panels - providing extra vertical strength and lateral stability
- Extra lateral rigidity is provided by a continuous aluminium headrail fixed to the frames and panels
- Quality brushed stainless indicator locks, coat hooks, and hinges

I PANEL INFORMATION


- · Available in standard 13mm thickness
- 13mm resin bonded core, Compact Laminate tested to IS EN 438-4
- · Resistance too: Impact, Moisture, Wear & Graffiti
- Antibacterial JIS 2 2801: Antibacterial eliminates the growth of early 99% of common forms of bacteria on any DuraLam surface growth of nearly 99% of common forms of bacteria
- Fire protection NZBC C/AS2 AS7
- We offer a 10 year guarantee on panel integrity
- Duralam Compact Laminate Panels are Greenguard certified

| ALUMINIUM INFORMATION

- HEAD RAIL: Oval 100mm x 33mm Extruded Aluminium alloy 6060 with exposed face with anodised or powder coated finish head rail.
- HEAD RAIL/POST: Square 40mm x 40mm
 Extruded Aluminium alloy 6060 with exposed face

with anodised or powder coated finish head rail.

- WALL CHANNEL: 60mm x 50mm rounded edged extruded aluminium alloy 6060 with anodised or powder coated finish wall channel.
- COLOUR OPTIONS:
 - Silver Anodised (Standard)
 - · Black Anodised
 - · Silver Pearl Powder Coated (Standard)



| PANEL COLOUR OPTIONS

The Classic Range is available in:

- Duraplan Stocked and Extended Colour Ranges
- · Laminex Colour Range

| PANEL FINISH OPTIONS


- Suede (Standard)
- Finguard (anti-fingerprint)
- Gloss
- · Decorative

| WARRANTY DETAILS

Our Standard Warranties are:

- · 10 Years on Panel Integrity
- 2 Years on Hardware
- · 2 Years on Installation

Resistant to: Impact, Moisture, Wear, and Graffiti

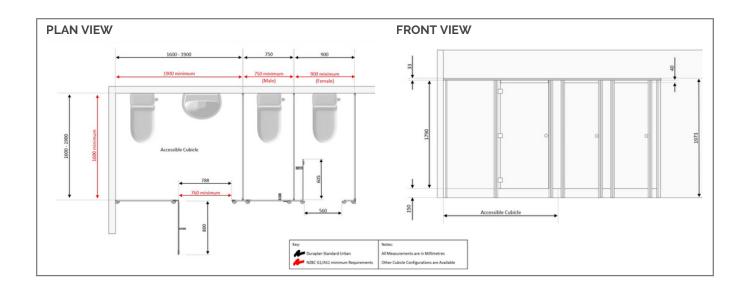

| HARDWARE INFORMATION

FINISH:

- · Quality and solid stainless hardware
- Brushed Stainless
- Black Powder Coated

MOUNTING:

- · Concealed Screw Fix
- Surface Mounted

FEATURES:

- · Quality indicator locks, coat hooks & hinges
- · Robust & Durable Fittings
- · Door opening or closing is spring assisted
- · Fully Adjustable Spring Hinges to suit door
- · Can be set to Hold Open / Hold Closed
- · Disabled Lock Option

Duraplan Standard Hardware:







Duraplan Aqua Hardware:







| DIMENSION DETAILS

Duraplan Cubicle Partitions are customised to fit your measurements, depths and widths can be varied to suit. The Classic Range standard dimensions are:

- Height 1975mm with 150mm floor clearance
- Depth 1600mm-1830mm
- Standard Cubicle Doors are 600mm
- Open-in door option is recommended for standard cubicles
- Accessible / Disabled Cubicles:
 - 1900 x 1600mm (Toilet & Basin)
 - 2100 x 1900mm (Toilet, Shower & Basin)
 - 788 mm Doors Swing Hinge or sliding doors

Please contact us for Colour Samples or for further product information & details.

WWW.DURAPLAN.CO.NZ

