



STARLINE-DECOWOOD

STARLINE - DECOTREND



ALUMINIUM HANDRAILS WITH WOOD OR TREND EFFECT BAND -90MM HIGH

Applications


The Decowood or Decotrend Starline provide both a good grip and a stylish decorative touch with their wood or trend effect band. They are ideally suited for straight and curved corridor areas with light traffic of trolleys in public buildings: hospitals, clinics, retirement homes, hotels, offices. Starline can be bent for curved sections. A removable system is available to provide continuation of the handrail in front of service ducts. They are fitted with bactericidal joints.

Specification

• Description: anodised aluminium handrail with a wood or trend effect PVC band (Starline - Decowood or Starline - Decotrend as manufactured by SPM). The height of the handrail is 90 mm, it has an overall projection of 80 mm and a depth of 30 mm. It consists of a 1.5 mm thick continuous and satin silver anodised aluminium profile. Various smooth and antibacterial PVC accessories with solid colour (wall returns, 90° internal and external angle pieces or made-to measure from 90° to 160°, endcaps), supplied with bactericidal joints, are available in silver tone to finish the handrail assembly. Wall fixing is by satin silver anodised aluminium brackets, 40 mm deep, curved and perforated with 2-point self-locking. The section comprises a groove into which brackets, accessories slide and lock. Accessories are fitted on the section and fixed with locking screws. A self-adhesive wood or

trend effect PVC band is bonded to the rail assembly. The profile can be


- Environment: no heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/BPA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the French regulation (23 March 2011 nr 2011-321 Decree and 19 April 2011 Order). 100% of the product are recyclable.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: upper edge of section 0.90 m max. above floor level. Fixes to self-locking 2-point perforated brackets screwed to the wall at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard). Wall returns, angles and endcaps to be fixed with pop rivets.

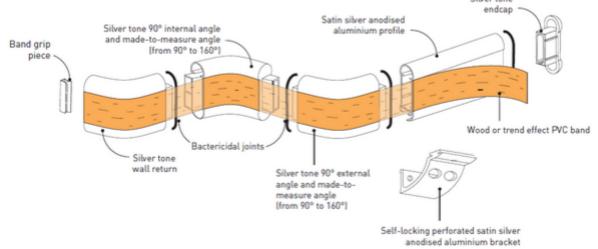







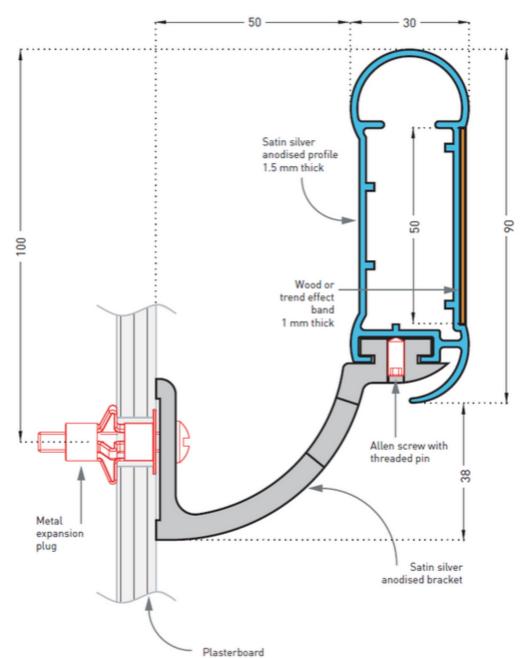

Description

- Model: Starline Decowood or Decotrend anodised aluminium handrail with wood or trend effect PVC band
- Height: 90 mmDepth: 30 mmLength: 4 m
- Overall projection: 80 mmStand-off from wall: 50 mm
- Material: satin silver anodised aluminium profile with wood or trend effect PVC band, Bs2d0 fire rated, bactericidal joints
- Fixing components: 2-point self-locking perforated satin silver anodised aluminium brackets, screwed to wall at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard)
- Colours for the band:
- 7 wood effect
- 4 trend effect

